

- Standard lifting height: 3 m
- Possible extension: 6 m

**Compact / Lightweight:**


- Headroom: 230 mm
- Weight of the device (with 3 m lift): 3.5 kg
- Additional weight per metre of lift > 3 m: 0.54 kg
- Force on the operating chain at full load: 11.4 daN/kg

**Reliability / Safety :**

- Galvanised lifting and operating chain
- Lifting chain grade 80 4 X 12 mm
- Operating chain 2.4 X 14 mm
- 360° pivoting hooks with removable safety catches marked with the WLL of the hoist

Note: The 250 kg tralift hoist cannot be fitted with a load limiter

**Spécifications**

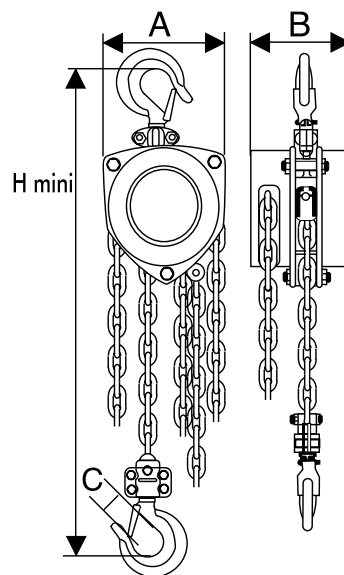

WLL	Number of falls	Maximum force on and chain (daN/kg)	Load chain (mm)	Hand chain (mm)	Hoist weight 3 m lift (kg)	Chain weight* extra/m (kg)	dimensions (mm)			
							A	B	C	H mini
250 kg	1	11	4 x 12	2,4 x 14	3,5	0,54	100	110	18	230

\* Weight with load and hand chain