

# bravo®

**NEW**

## MULTI-PURPOSE


- Lever hoist ideal for industrial and building/civil engineering applications
- Specially designed for pulling, lifting, positioning and adjusting loads in workshops and/or on building sites.

## ROBUST

- The hoist and its components are made of high tensile alloy steel
- Excellent weight / capacity / size ratio
- Anticorrosion load chain grade 80

## SAFE

- 360° swivel hooks with overload opening indicators
- Removable safety catches marked with the WLL of the hoist
- Load sprocket wheel with closed bearings
- Free wheel safety device activates braking mechanism when load applied in neutral position
- Load limiter available as an option

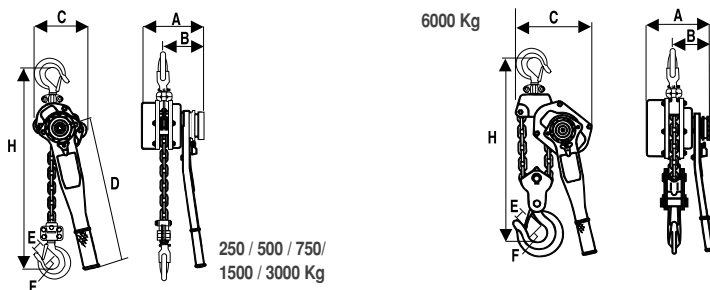

Model	WLL	Number of falls	Standard height of lift* (m)	Maximum force on lever*** (daN/kg)	Weight (kg)	Chain size** (mm)	Dimensions in millimeters						
							A	B	C	D	E	F	H mini
250	250 kg	1	1,5	26	2	4 x 12	91	70	71	157	21	28	233
500	500 kg	1	1,5	34	5	5 x 15	110	80	122	228	23	35	305
750	750 kg	1	1,5	20	7	6 x 18	139	84	153	288	26	37	303
1500	1500 kg	1	1,5	21	11	7 x 21	174	108	160	418	31	45	370
3000	3000 kg	1	1,5	33	20	10 x 30	200	115	185	418	39	55	500
6000	6000 kg	2	1,5	34	30	10 x 30	200	115	230	418	45	65	630

\* - Up to 6 m as an option -  
 \*\* - ISO grade 80  
 \*\*\* - To lift nominal capacity



**TRACTEL S.A.S. :**  
 Saint-Hilaire-sous-Romilly  
 B.P. 38 - F-10102 Romilly-sur-Seine Cedex  
 Tél. +33 3 25 21 07 00  
 Fax. +33 3 25 21 07 11  
 ISO 9001



www.tractel.com - E-mail : info@tractel.com

**Export department :**  
 Tel. (352) 43 42 42-1  
 Fax (352) 43 42 42-200

**Paris region offices :**  
 Tel. +33 1 48 58 91 32  
 Fax +33 48 58 19 95

# bravo®

# bravo®

Lever hoist, 250 to 6000 daN/kg



**HIGH PERFORMANCE**

**MULTI-PURPOSE**

**RELIABLE**

**LOW MAINTENANCE**

 **Tractel** Group