


hydrofor®

hydraulic toe jacks

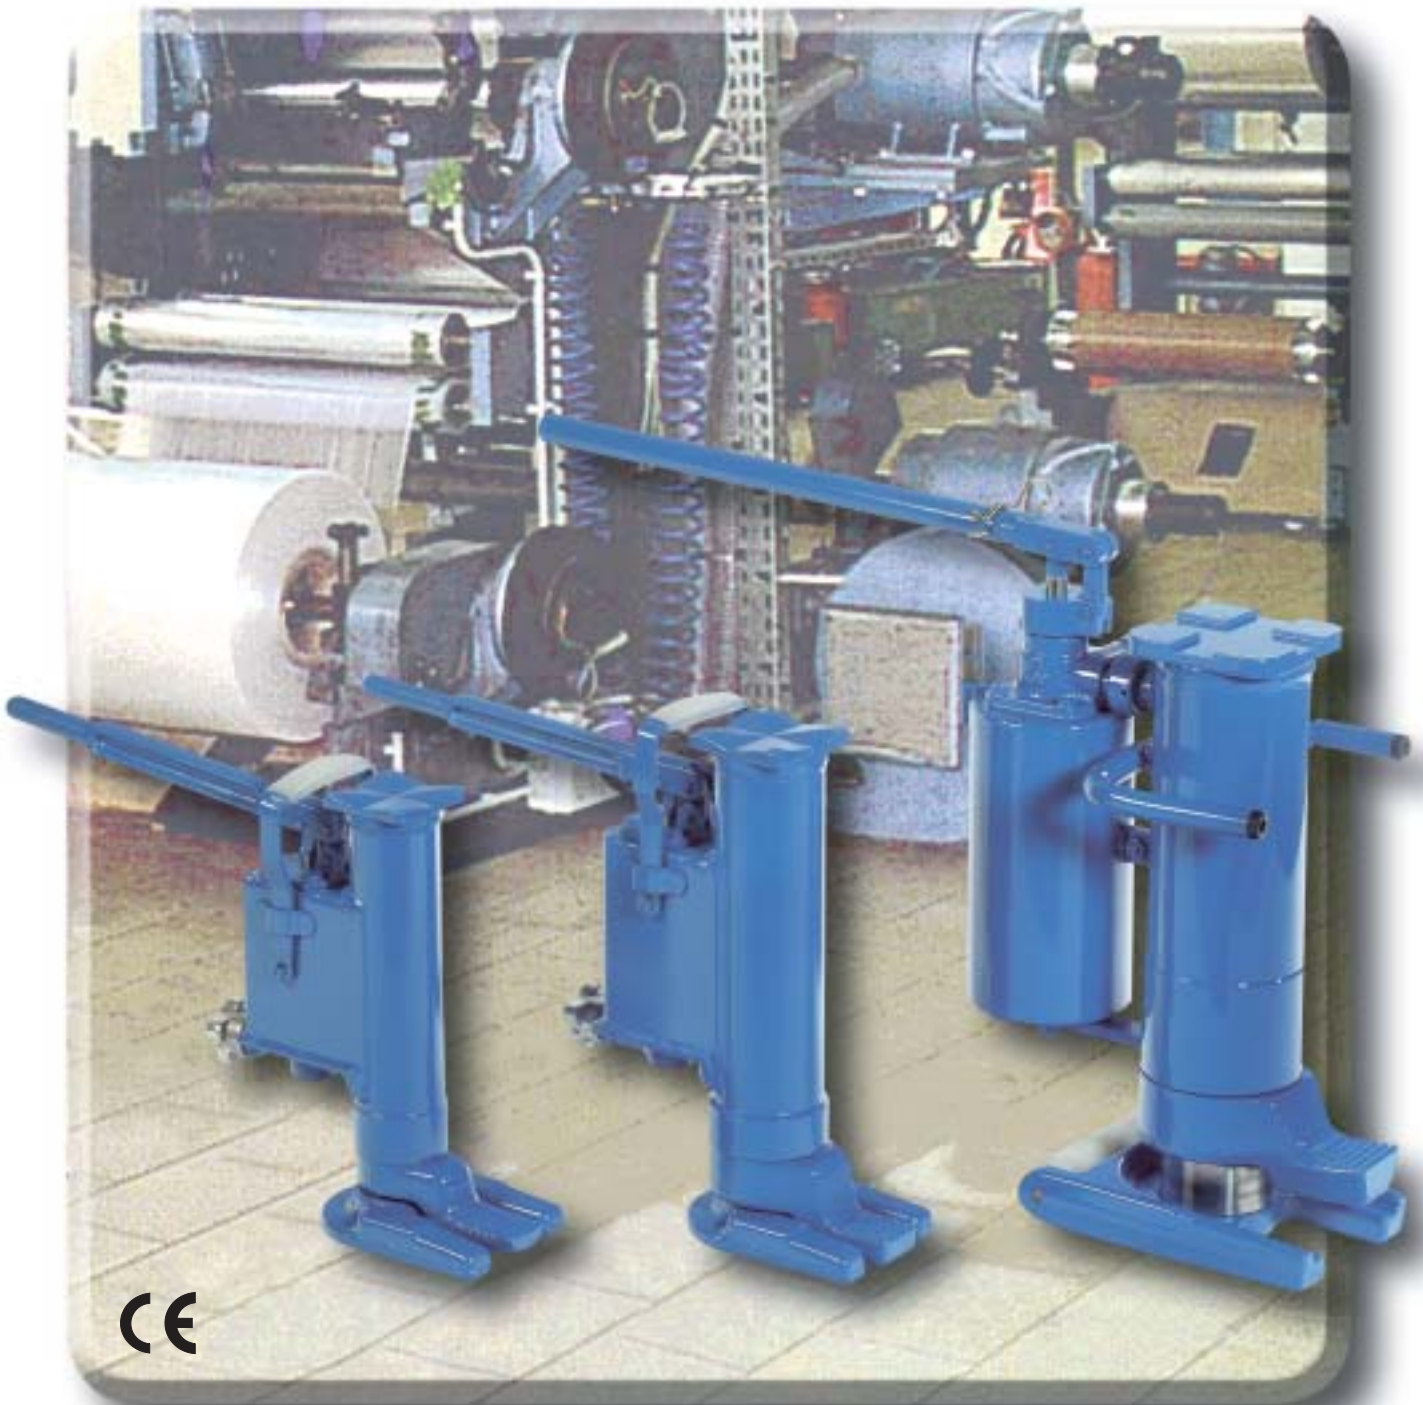

TRACTEL OFFERS A COMPLETE RANGE OF HYDRAULIC TOE JACKS IN 5, 10 AND 20 t W.L.L

DESCRIPTION AND ADVANTAGES

- **Moulded single block** body
- **No draining of the hydraulic pump** even when jack is in horizontal position
- Can be used **in any position**
- Load lifted **close to the ground level**
- **360° rotation of the lifting toe** around the column
- Extremely stable base plate
- A release button controls lowering operations with instant stop
- Pressure valve to avoid overloading
- Removable operating lever




Hydrofor 5 t

Hydrofor 10 t

Hydrofor 20 t

Model	WLL	Effort on lever	Weight	Stroke	Minimum clearance from floor		Dimensions (mm)
		(Nm)	(kg)	(mm)	Head (mm)	Toe (mm)	
Hydrofor	5 t	450	18	205	360	25	360 - 540 - 130 x 210
Hydrofor	10 t	500	25	240	417	25	417 - 540 - 130 x 210
Hydrofor	20 t	450	52	220	440	40	440 - 850 - 180 x 275

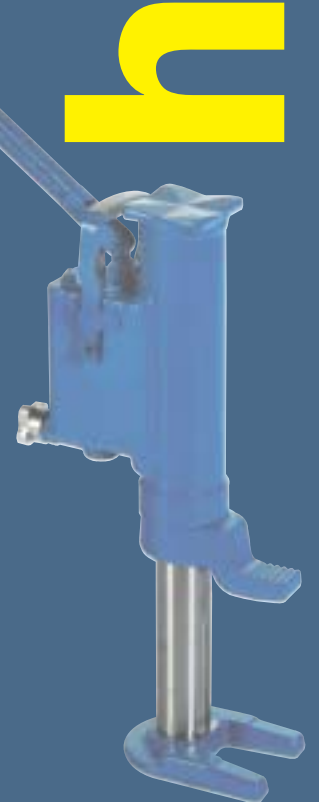

hydrofor®

TRACTEL S.A.S. :
 Saint-Hilaire-sous-Romilly
 B.P. 38 - F-10102 Romilly-sur-Seine Cedex
 Tél. +33 3 25 21 07 00
 Fax. +33 3 25 21 07 11
 ISO 9001



www.tractel.com - E-mail : info@tractel.com

Export department :
 Tel. (352) 43 42 42-1
 Fax (352) 43 42 42-200

Paris region offices :
 Tel. +33 1 48 58 91 32
 Fax +33 1 48 58 19 95